



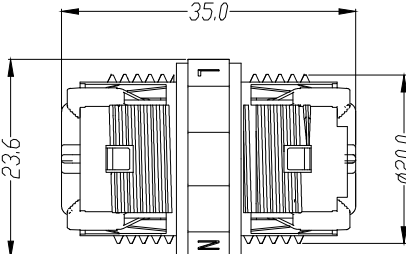
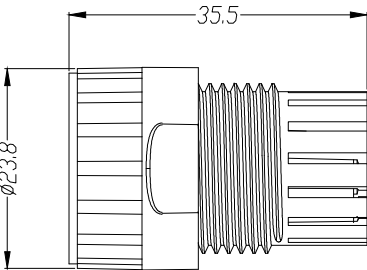

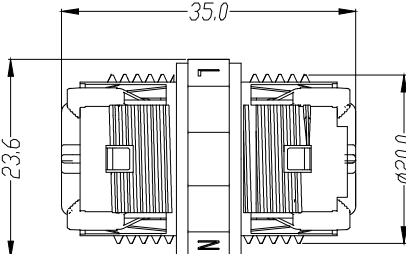
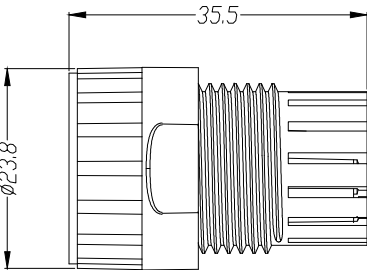

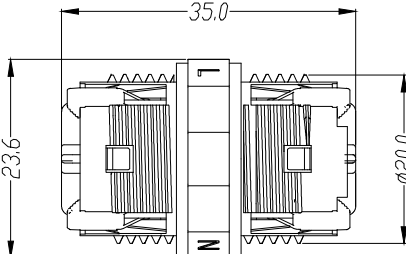
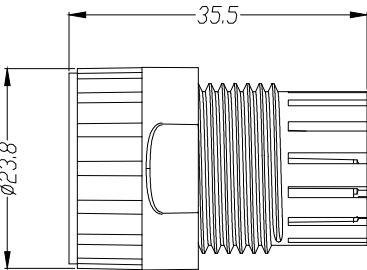

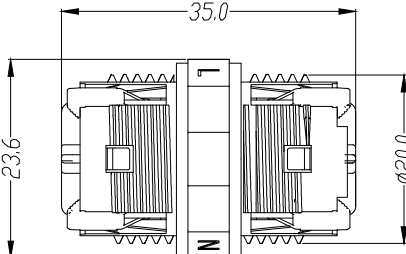
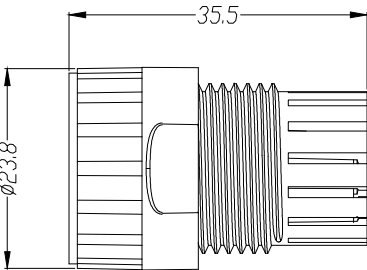

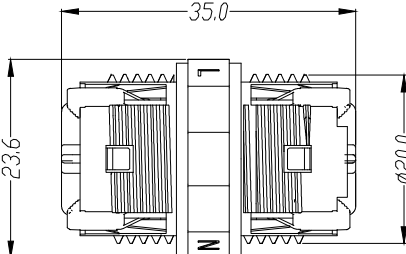
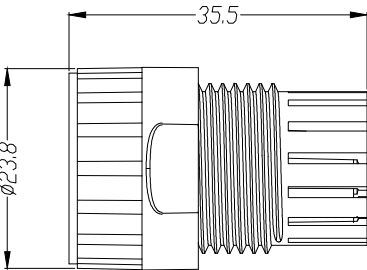




A	1	2		3	4	5	6		7		8										
	成品图							版本 (REV)	描述 (DESCRIPTION)		设计 (DESIGN)	DATE									
	原材料							PA66、COPPER ALLOY、SILICONE		AO	新版发行		李小亮	2022.03.31							
	符合认证标准							CQC/UL/TUV/RoHS/CE													
B	阻燃等级		UL94 V-2																		
	防护等级		IP68																		
	额定电压/额定电流		450V / 16A																		
	耐电压		2500V																		
C	线材规格		0.5mm² ~ 2.5mm²																		
	工作温度		-40℃ ~ +105℃																		
	料号		胶塞孔径 øD	适用线外径																	
	EW-P20-03301BB11		ø11.5mm	ø9-12mm																	
D	EW-P20-03301BB8		ø8.5mm	ø5-9mm																	
	夹线胶塞孔径																				
																					
																					
E																					
																					
																					
																					
F	产品单重		外箱尺寸		单箱数量		单箱毛重		未注公差 (TOLERANCE UNSPECIFIED)												
	26.2g		42×30×34cm		600 pcs		16.6kg		X. ±0.35 X.XX ±0.10 X.° ±3° X.X° ±2° X.XX° ±1°				单位 (UNIT)		mm	绘图 (DRAW)	李小亮 / 2022.03.31	料号 (PART NO)	EW-P20-03301BB##		
									X. X ±0.20 X.XXX ±0.05		比例 (SCALE)		1:1	审核 (CHKD)		图号 (DWG NO)	EW-P20-03301BB##				
											页次 (SHEET)		1/1	核准 (APPD)		品名 (TITLE)	EW-P20-3P防水连接器				
1	2		3	4	5	6		7		8											