
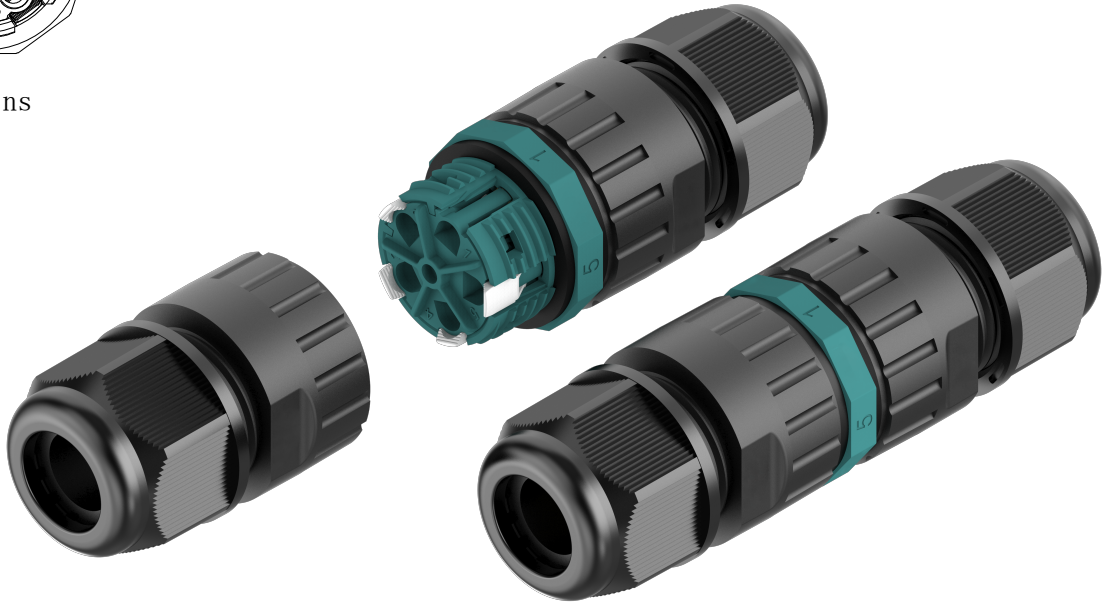
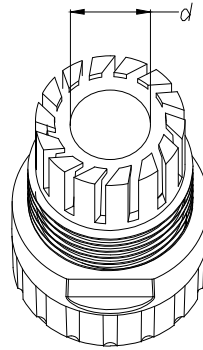
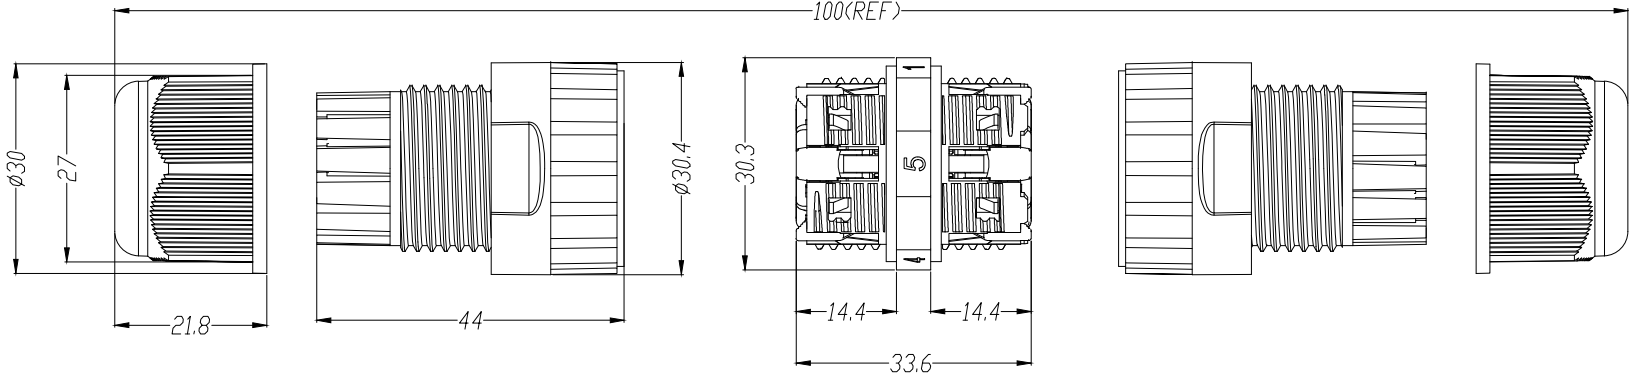



1		2		3		4		5		6		7		8				
A	成品图		 4 Pins								REV	DESCRIPTION		DESIGN	DATE			
	原材料										PA66、COPPER ALLOY、SILICONE		AO	NEW DRAWING		EDDIE	2022.03.31	
	符合认证标准										CQC/UL/TUV/RoHS/CE							
	阻燃等级										UL94 V-2							
B	防护等级		IP68															
	额定电压/额定电流		450V / 16A															
	耐电压		2500V															
	线材规格		0.5mm² ~2.5mm²															
C	工作温度		-40℃ ~+105℃															
	产品料号		胶塞孔径d												适用线外径			
	EW-P25-04301BB14		ø14.5												ø10-14			
	EW-P25-04301BB12		ø12												ø9-12			
D	EW-P25-04301BB8		ø8.5		ø5-9													
	Weight		MEAS		Each carton number												G. W.	
	47.3g		42x30x34cm		300 pcs												15kg	
	TOLERANCE UNSPECIFIED		X. ±0.35 X.XX ±0.10 X.X° ±3° X.X° ±2° X.XX° ±1°														UNIT mm DRAW EDDIE / 2022.03.31 PART NO EW-P25-04301BB#	
E	SCALE 1:1		CHKD				DWG NO EW-P25-04301BB#											
	SHEET 1/1		APPD				TITLE P25-4P防水连接器											
1		2		3		4		5		6		7		8				