


1	2		3	4	5	6	7	8	
A	原材料	PA66 铜合金 硅胶	2 PIN 			版本	说明	设计	日期
	阻燃等级	UL94 V-2				A0	首次发布	MYJ	2022/5/27
	防护等级	IP68							
	额定电压 / 额定电流	450 V / 24 A							
B	耐电压	2500 V							
	线材规格	0.5~2.5mm ²							
	工作温度	-40~105 °C							
	产品料号	胶圈孔径 d	适用线外径						
	EW-M25B-02301YG14	φ 14.5 mm	φ 10~14 mm						
	EW-M25B-02301YG12	φ 12 mm	φ 9~12 mm						
C	EW-M25B-02301YG8	φ 8.5 mm	φ 5~9 mm						
D	夹线胶圈 								
E									
F									
产品单重	外箱尺寸	单箱数量	单箱毛重	未注公差	单位	mm	绘图	料号	EW-M25B-02301YG##
				X. ±0.35 X.XX ±0.10 X.X° ±3° X.X° ±2° X.XX° ±1°	比例	1:1	校对	图号	EW-M25B-02301YG##
				X.X ±0.20 X.XXX ±0.05	页次	1/1	批准	品名	EW-M25B-2P 防水连接器
1	2	3	4	5	6	7	8		

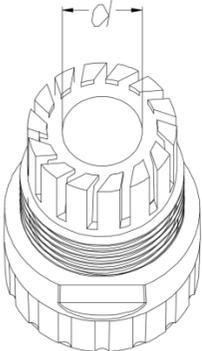