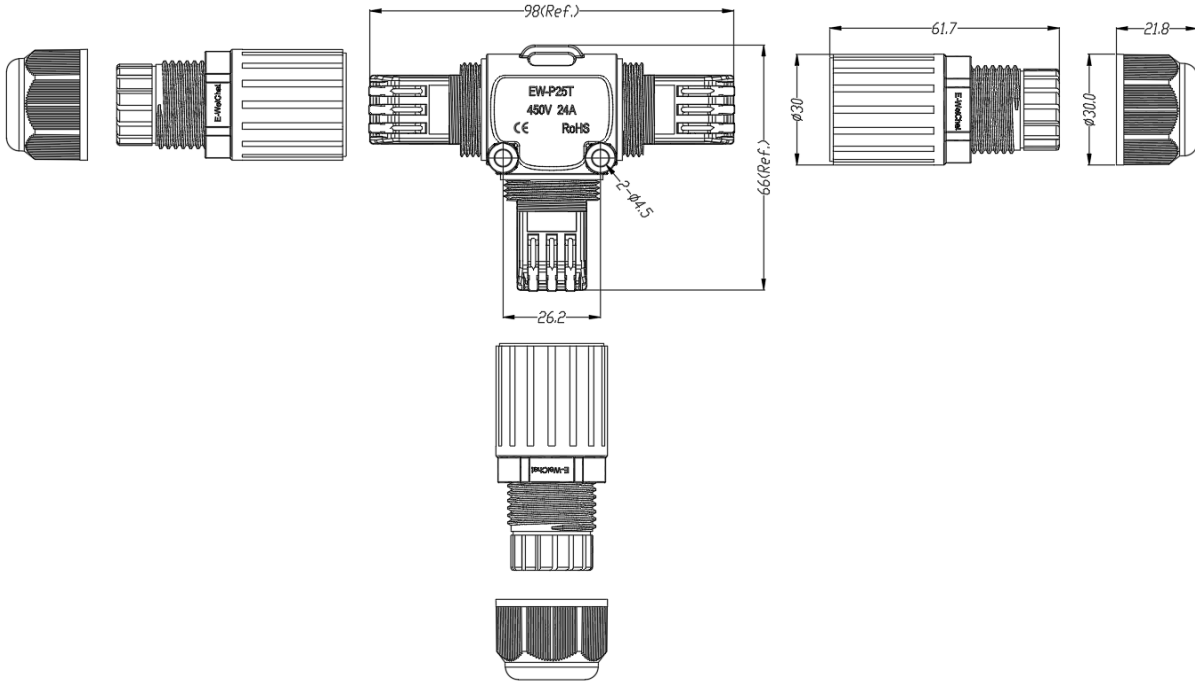
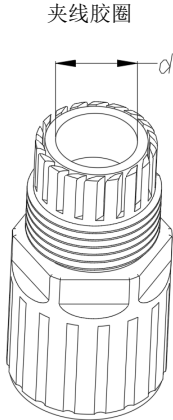
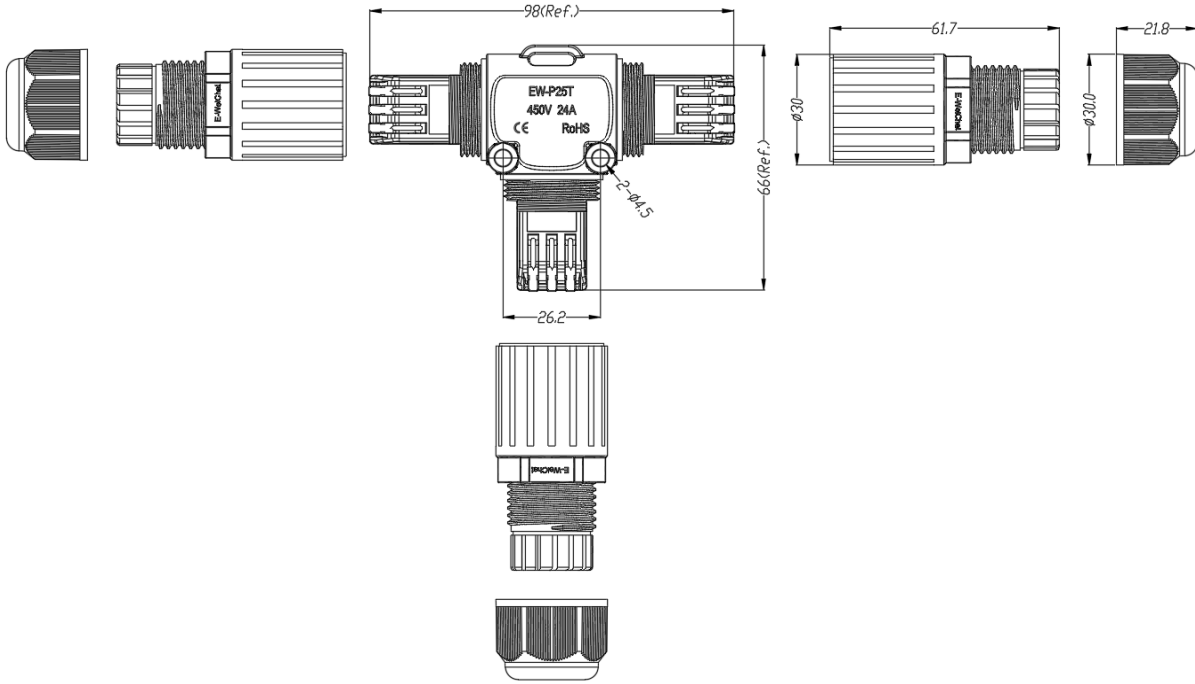


1		2		3		4		5		6		7		8					
A	原材料		PA66、铜合金、硅胶												版本	说明		设计	日期
	符合认证标准		RoHS/CE												A0	首次发布		EDDIE	2022/4/25
	阻燃等级		UL94 V-0																
	防护等级		IP68																
	额定电压 / 额定电流		450 V / 24 A																
B	耐电压		2500 V		产品颜色以实物为准，图片仅供参考 														
	线材规格		0.5~2.5mm ²																
	工作温度		-40~105 ℃																
	产品料号		胶圈孔径 d												适用线外径				
	EW-P25T-03301YB14		Φ 14.5 mm												Φ 10~14 mm				
C	EW-P25T-03301YB14		Φ 12 mm		Φ 9~12 mm		产品颜色以实物为准，图片仅供参考												
	EW-P25T-03301YB8		Φ 8.5 mm		Φ 5~9 mm														
D	夹线胶圈 																		
E																			
F																			
	122 g		42x30x34 cm		150 PCS		18.3 Kg		未注公差		单位	mm	绘图	料号	EW-P25T-03301YB##				
	产品单重	外箱尺寸	单箱数量	单箱毛重	X. ±0.35	X.XX ±0.10	X.° ±3°	比例	1:1	校对		图号	EW-P25T-03301YB##						
					X.X ±0.20	X.XXX ±0.05	X.X° ±2°	页次	1/1	批准		品名	EW-P25T 防水连接器						
1		2		3		4		5		6		7		8					