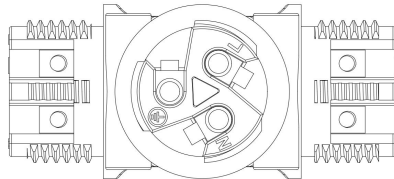
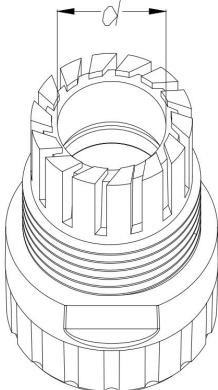
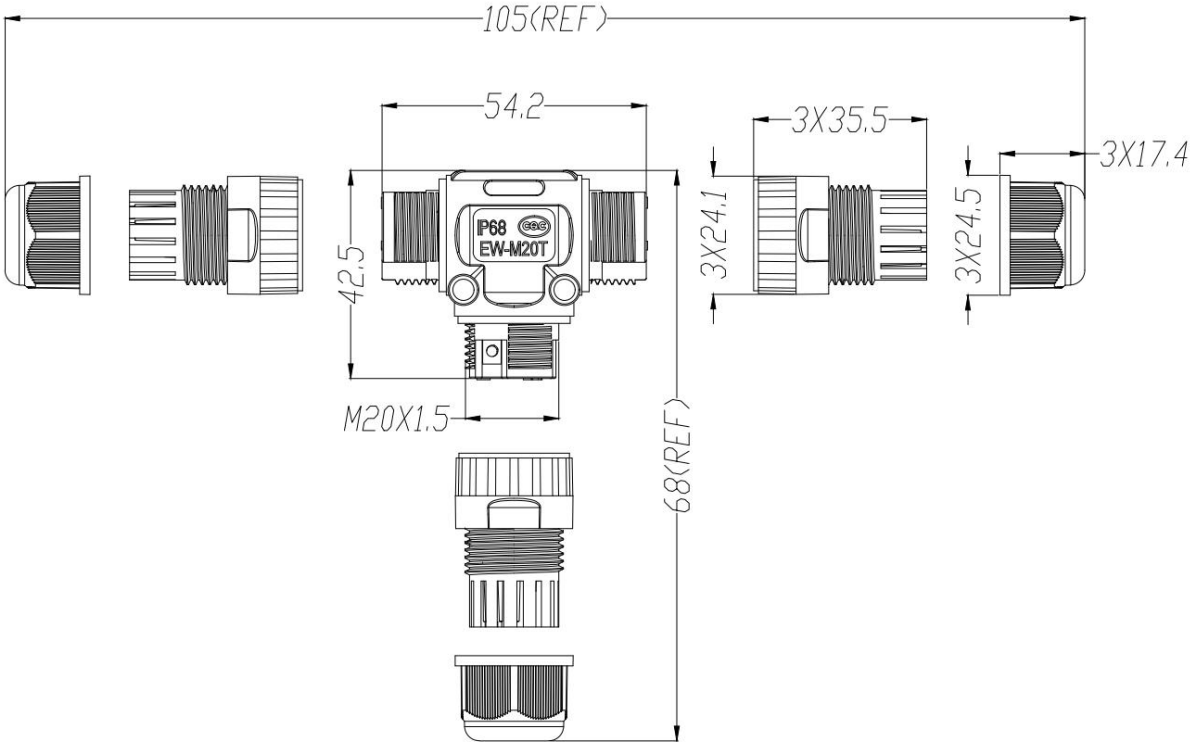
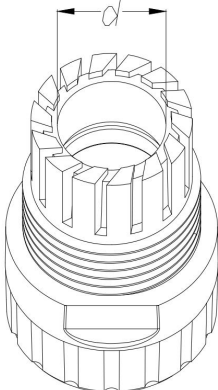
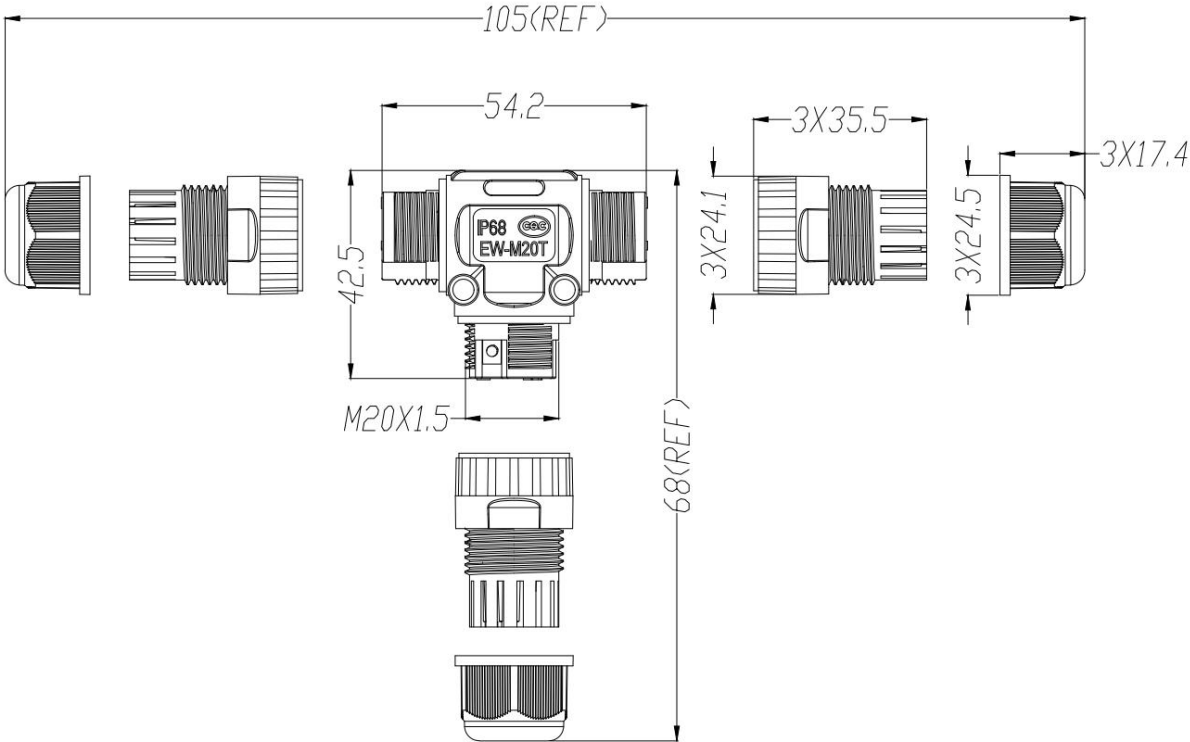
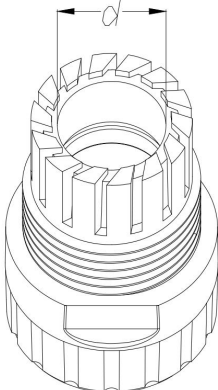
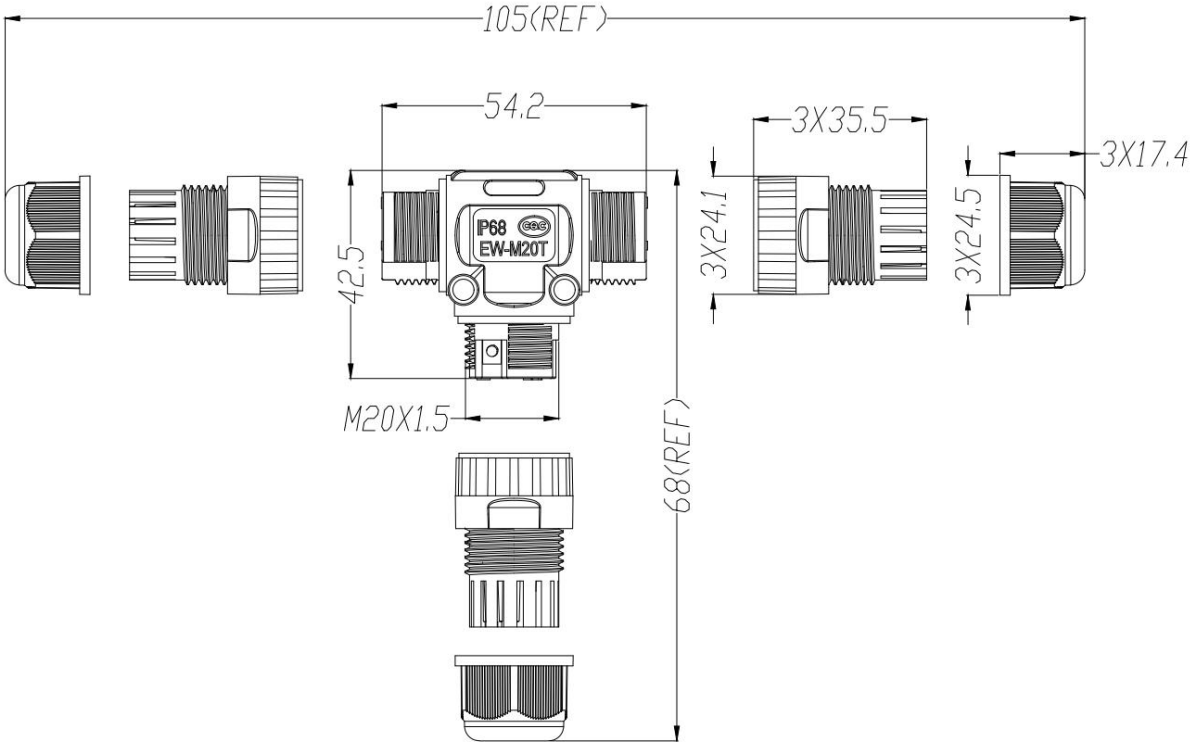
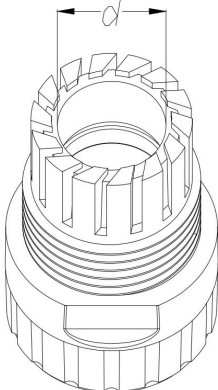
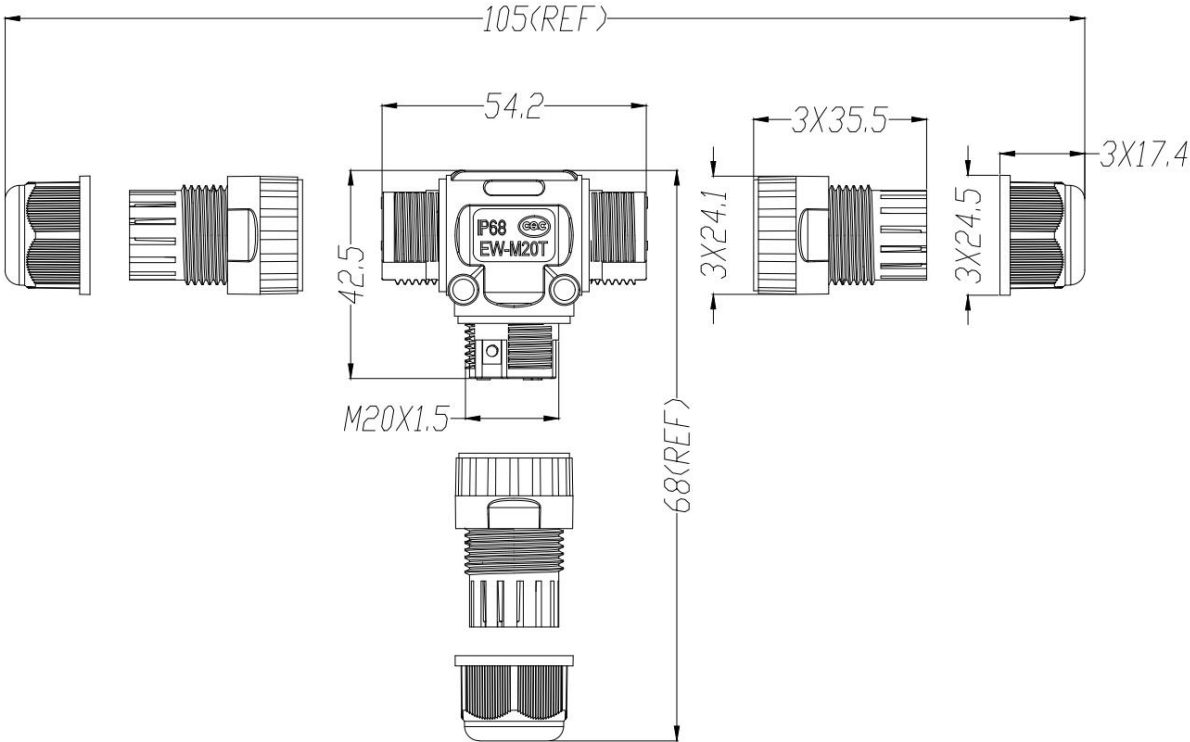


1		2		3		4		5		6		7		8														
A	原材料		PA66、铜合金、硅胶		3 PIN 								版本	说明		设计	日期											
	符合认证标准		CQC/TUV/SAA/Rohs/CE										A0	首次发布		Andy. Pi	2022/4/14											
	阻燃等级		UL94 V-2																									
	防护等级		IP68																									
	额定电压 / 额定电流		450 V / 24 A																									
B	耐电压		2500 V										产品颜色以实物为准，图片仅供参考															
	线材规格		0.5~2.5mm ²																									
	工作温度		-40~105 ℃																									
产品料号		胶圈孔径 d		适用线外径																								
EW-M20T-03101BB11		Φ 11.5 mm		Φ 9~12 mm																								
EW-M20T-03101BB8		Φ 8.5 mm		Φ 5~9 mm																								
EW-M20T-03101BB5		Φ 5.0 mm		Φ 3~5 mm																								
C																												
D																												
E																												
F																												

69.2 g		42x30x34 cm		250 PCS		18.0 Kg		未注公差			单位	mm	绘图		料号	EW-M20T-03101BB##		
X. ±0.35		X.XX ±0.10		X.° ±3°		X.X° ±2°			比例	1:1	校对		图号	EW-M20T-03101BB##				
X.X ±0.20		X.XXX ±0.05		X.XX° ±1°			页次	1/1	批准		品名	EW-M20T-3P 防水连接器						
产品单重		外箱尺寸		单箱数量		单箱毛重												

1

2

3

4

5

6

7

8