





1	2		3	4	5	6	7	8	
A	原材料		PA66、铜合金、硅胶		<p>3 PIN</p> 	版本	说明	设计	日期
	符合认证标准		CQC			A0	首次发布	EDDIE	2022/4/12
	阻燃等级		UL94 V-2						
	防护等级		IP68						
	额定电压 / 额定电流		450 V / 41 A						
B	耐电压		2500 V						
	线材规格		1.5~6mm <sup>2</sup>						
	工作温度		-40~105 °C						
C	产品料号	胶圈孔径 d	适用线外径						
	EW-M25T-03101BB14	φ 14.5 mm	φ 10~14 mm						
	EW-M25T-03101BB12	φ 12 mm	φ 9~12 mm						
	EW-M25T-03101BB8	φ 8.5 mm	φ 5~9 mm						
D									
E									
F									

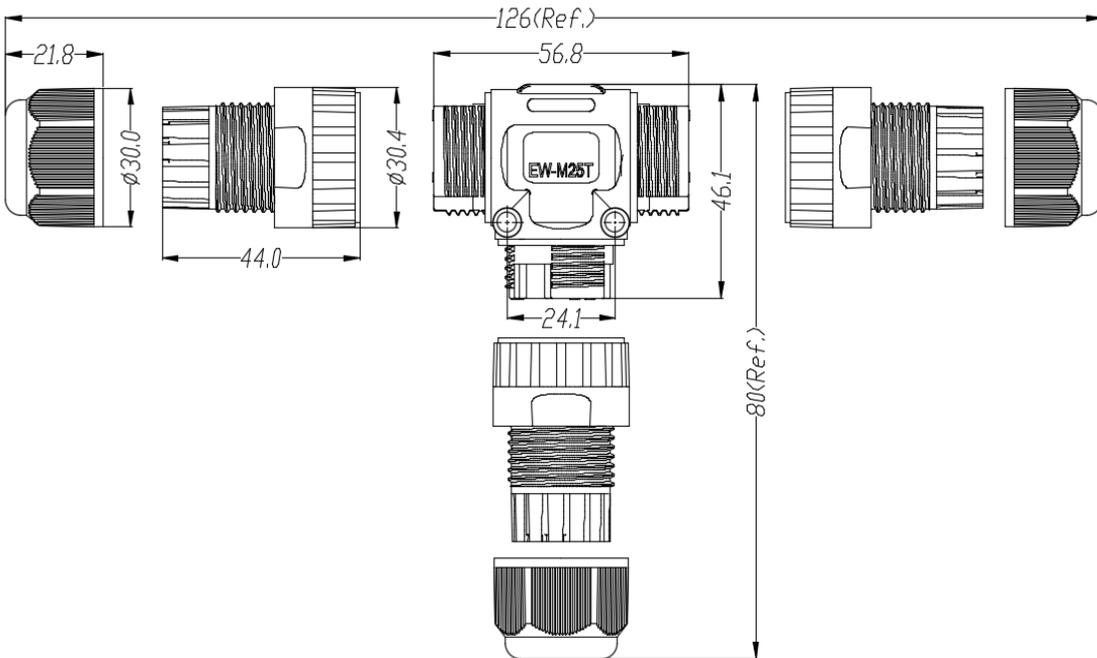

产品颜色以实物为准，图片仅供参考

夹线胶圈

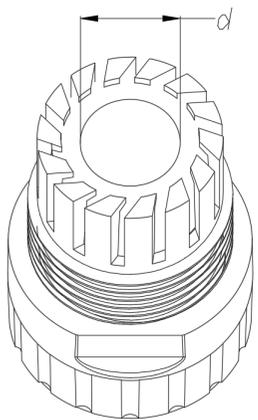

109 g		42x30x34 cm		160 PCS		18.25 Kg		未注公差			单位	mm	绘图	料号	EW-M25T-03101BB##	
产品单重	外箱尺寸	单箱数量	单箱毛重	X. ±0.35	X.XX ±0.10	X.° ±3°	比例	1:1	校对	图号	EW-M25T-03101BB##		品名	EW-M25T-3P 防水连接器		
				X.X ±0.20	X.XXX ±0.05	X.X' ±2°					页次	1/1				批准

